

# STEELFLEX<sup>®</sup> WALK-ON WAY COVER | QUOTE REQUEST FORM

Date \_\_\_\_\_ Address \_\_\_\_\_  
 Company Name \_\_\_\_\_ City \_\_\_\_\_ State/Prov. \_\_\_\_\_  
 Contact \_\_\_\_\_ Country \_\_\_\_\_ Zip/Postal Code \_\_\_\_\_  
 Quantity \_\_\_\_\_ Telephone \_\_\_\_\_ Fax \_\_\_\_\_  
 Email \_\_\_\_\_

## 1. Application Information

New Design    Replacement (Part# \_\_\_\_\_)    Single Cover    Set of Covers (left/right)

Machine make: \_\_\_\_\_ Machine model #: \_\_\_\_\_

Operating environment:  Dry    Grinding    Hot chips    Aluminum    Heavy coolant    Other \_\_\_\_\_

Temperature range: Continuous (ambient): \_\_\_\_\_ Minimum: \_\_\_\_\_ Maximum: \_\_\_\_\_    °F    °C

Maximum travel speed: \_\_\_\_\_ Acceleration (please indicate units of measurement): \_\_\_\_\_

Movements/day: \_\_\_\_\_ Axis: \_\_\_\_\_

What is the maximum load applied at the center of the unsupported span on a single 12x12-inch footprint? \_\_\_\_\_    lbs.    kg.

Is a potential for multiple people standing or walking on the cover at once? (please explain traffic patterns) \_\_\_\_\_


Other than a person walking across the cover, is there any other dynamic load expected? e.g. rolling cart, dropped tool/part? \_\_\_\_\_

Please Note: Steelflex covers should only be walked on while stationary.

## 2. Replacement Covers (For replacement covers only; please specify Cover Profile Dimensions "A" and "B" below.)


(A) Support Type:

1/2" Ribs    1" Tubes  
 5/8" Ribs    1-1/2" Tubes  
 3/4" Tubes    2" Tubes




(B) Support Spacing:

1/4"    1/2"    Other \_\_\_\_\_



## 3. Mounting Options (Note: Right-hand drive shown)

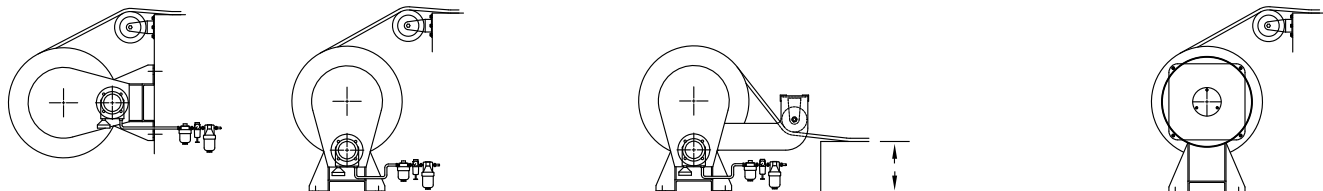

Machine-Mounted    Floor-Mounted, Below the Way    Floor-Mounted, Above the Way    Floor-Mounted, Spring Take-Up

Distance Between Floor and Top of Way: \_\_\_\_\_

## 4. Dimensions (Note: Machine mount example shown)

(A) Overall Way Width: \_\_\_\_\_ (B) Largest Unsupported Span: \_\_\_\_\_


(C) Length from Center Line of Roller to Table/Column or Car when Shade Fully Extended: \_\_\_\_\_

(D) Shade Width: \_\_\_\_\_ (overall way width +2" recommended for walk-on covers)

Travel Distance: \_\_\_\_\_ Total Shade Length: \_\_\_\_\_

Way Height Above Floor: \_\_\_\_\_

Drive Side Location\*:  Right    Left    Both Same Side (for sets)

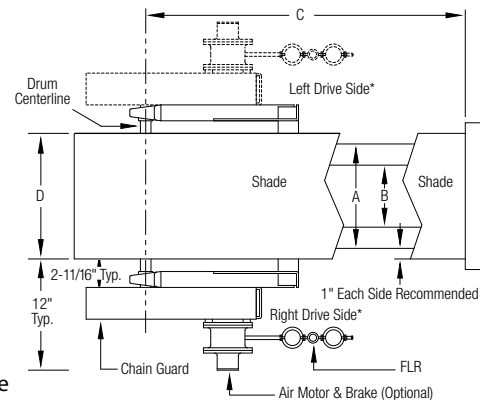

## 5. Options/Drive (Note: If air is turned off, an air brake is recommended)

Air Motor/Machine-Driven    Spring Drive Take-Up    Air Brake    Non-Skid Tape  
 Non-Skid Paint    Sponge Edge Seal    Brush Wiper    Nylon Riders    Filter Lubricator/Regulator