

CYLINDER ROD BOOTS | STANDARD SEWN BELLOWS

Gortite[®] sewn bellows provide maximum protection against cylinder rod scoring from chips, abrasive particles and other impinging objects. Units are manufactured of rugged neoprene coated nylon fabric. Rod boots are available in 12 standard sizes without tooling charges or minimum order quantities.

Features/Benefits:

- Reduce frequency of shaft seal replacements
- Prevent rod scoring
- Eliminate nicking of shafts and ball screws
- Protect against impinging chips
- Guard against grit abrasion
- Shield from corrosive splatter



SIZES

ROD BOOT STYLE	I.D. (Inside Diameter)	O.D. (Outside Diameter)	RETRACTED LENGTH (every 12" extended)	COLLARS: AVAILABLE I.D. SIZES (must be ordered in 1/8" increments)
SRA-15	3/4"	3"	3/4"	1/2" to 3"
SRB-15	1-1/8"	3-3/8"	3/4"	1/2" to 3-3/8"
SRC-15	1-1/2"	3-3/4"	3/4"	1/2" to 3-3/4"
SRD-15	1-7/8"	4-1/8"	3/4"	1/2" to 4-1/8"
SRE-15	2-3/8"	4-5/8"	3/4"	1/2" to 4-5/8"
SRF-15	2-7/8"	5-1/8"	3/4"	1/2" to 5-1/8"
SRG-25	3-3/8"	7"	1/2"	1/2" to 7"
SRH-25	3-7/8"	7-1/2"	1/2"	1/2" to 7-1/2"
SRJ-25	4-1/2"	8-1/4"	1/2"	1/2" to 8-1/4"
SRK-25	5"	8-3/8"	1/2"	1/2" to 8-3/8"
SRM-25	5-3/8"	9-1/2"	1/2"	1/2" to 9-1/2"
SRO-25	7-1/4"	11"	1/2"	1/2" to 11"

Mounting Accessories:

- C205 flange-type back up plates or C208 collar clamps – can be added to your order upon request.



CYLINDER ROD BOOTS | QUOTE REQUEST FORM

Date Needed By _____ Address _____
 Company Name _____ City _____ State/Prov. _____
 Contact _____ Country _____ Zip/Postal Code _____
 Quantity _____ Telephone _____ Fax _____
 Email _____


1. Rod Boot Style

- SRA-15 SRB-15 SRC-15 SRD-15 SRE-15 SRF-15
 SRG-25 SRH-25 SRJ-25 SRK-25 SRM-25 SRO-25

ROD BOOT STYLE	I.D. (Inside Diameter)	O.D. (Outside Diameter)	RETRACTED LENGTH (every 12" extended)	COLLARS: AVAILABLE I.D. SIZES (must be ordered in 1/8" increments)
SRA-15	3/4"	3"	3/4"	1/2" to 3"
SRB-15	1-1/8"	3-3/8"	3/4"	1/2" to 3-3/8"
SRC-15	1-1/2"	3-3/4"	3/4"	1/2" to 3-3/4"
SRD-15	1-7/8"	4-1/8"	3/4"	1/2" to 4-1/8"
SRE-15	2-3/8"	4-5/8"	3/4"	1/2" to 4-5/8"
SRF-15	2-7/8"	5-1/8"	3/4"	1/2" to 5-1/8"
SRG-25	3-3/8"	7"	1/2"	1/2" to 7"
SRH-25	3-7/8"	7-1/2"	1/2"	1/2" to 7-1/2"
SRJ-25	4-1/2"	8-1/4"	1/2"	1/2" to 8-1/4"
SRK-25	5"	8-3/8"	1/2"	1/2" to 8-3/8"
SRM-25	5-3/8"	9-1/2"	1/2"	1/2" to 9-1/2"
SRO-25	7-1/4"	11"	1/2"	1/2" to 11"

2. Rod Boot Dimensions (please specify in inches)

O.D. (outer diameter) of part to be covered: _____
 Extended length: _____ (without ends, in 12" increments)
 Travel distance: _____

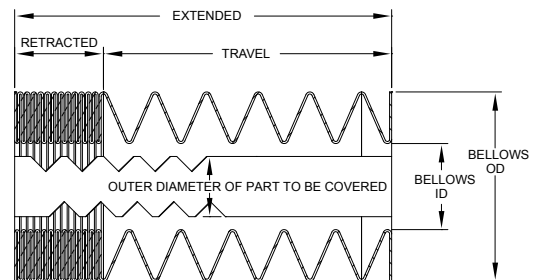

3. End Dimensions (choose end type for each end – standard flange or collar)

One End: Standard Flange
 Outer Diameter: _____ Inner Diameter: _____



Collar
 Outer Diameter: _____ Width: _____

Other End: Standard Flange
 Outer Diameter: _____ Inner Diameter: _____

Collar
 Outer Diameter: _____ Width: _____

COLLAR

STANDARD FLANGE

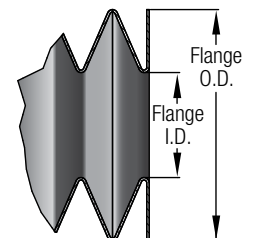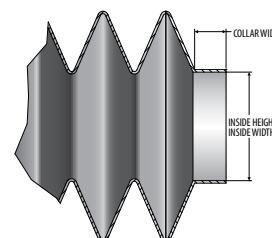

4. Mounting Accessories (please check options desired)

- C208 Clamp (0.5" minimum inner diameter) – C208 Clamps are stocked in any size required; clamp band is 0.5" wide
 C205 Flange-type back-up plate (shipped blank)
 C205 Flange-type back-up plate with mounting holes (please send sketch indicating bolt hole pattern)